

QPD6-1000-18000-30-S

6-Way, 1~18GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	1~18GHz
Insertion Loss ^{*1} :	3.3dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Isolation:	18dB min.
Amplitude Balance:	±0.7dB max.
Phase Balance:	±7° max.
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 5W max. as combiner

[1] Excluding theoretical loss 7.8dB.

Mechanical


Size ^{*2} :	121.9*77.7*12.7mm 4.799*3.059*0.5in
Connectors:	SMA Female
Mounting:	4-Φ3.6mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

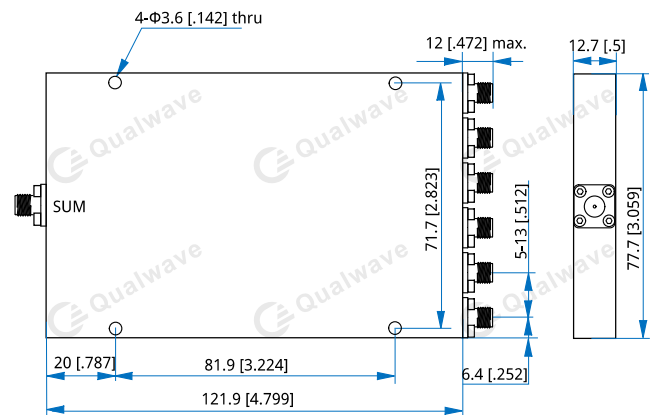

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD6-1000-18000-30-S

Customization is available upon request.