

QHC9-2000-6000-K4-NE

2~6GHz, 400W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	2~6GHz
Insertion Loss:	0.5dB max. (Average)
VSWR:	1.5 max.
Isolation:	15dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Average Power:	400W CW

Mechanical

Size ^{*1} :	94.7*38*31mm 3.728*1.496*1.22in
Connectors:	N female, SC female
Mounting:	2-Φ3mm through-hole


[1] Exclude connectors.

How To Order

QHC9-2000-6000-K4-NE

Customization is available upon request.

Outline Drawings

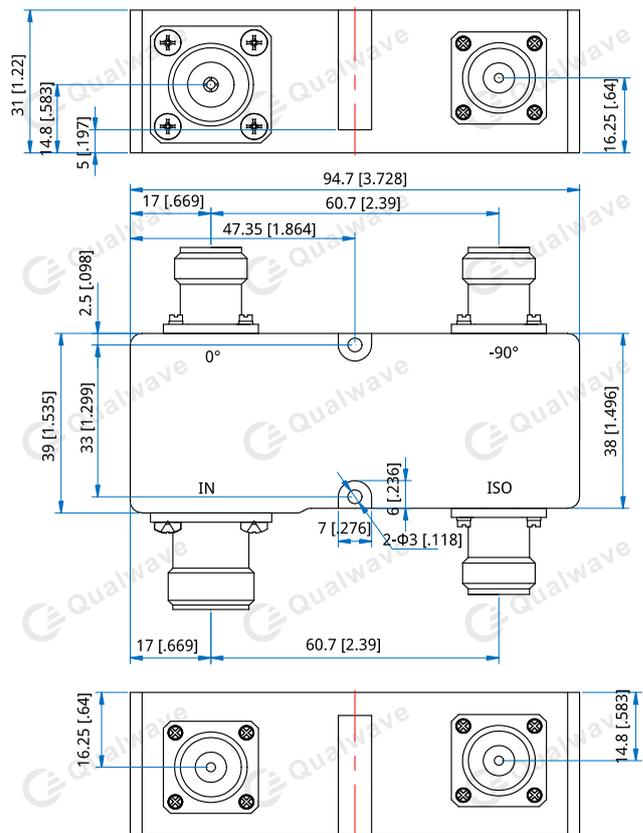

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]