

QHC9-33-80-K2-S

33~80MHz, 200W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	33~80MHz
Insertion Loss:	0.5dB max.
VSWR:	1.5 max.
Isolation:	15dB min.
Amplitude Balance:	±1.2dB max.
Phase Balance:	90±10°
Average Power:	200W

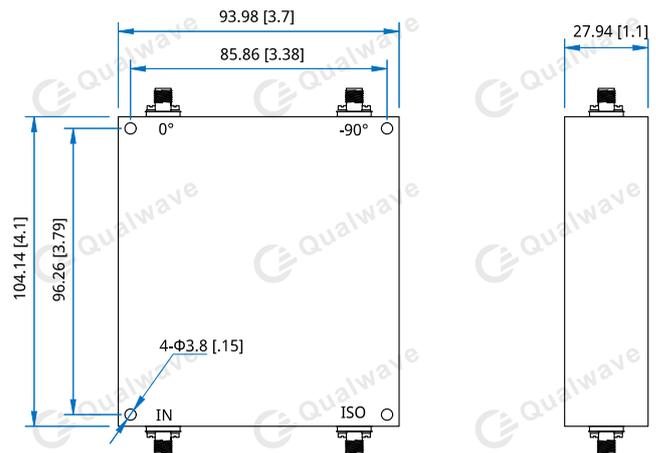
Mechanical

Size*1:	104.14*93.98*27.94mm
	4.1*3.7*1.1in
RF Connectors:	SMA female
Mounting:	4-Φ3.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.008in]

How To Order

QHC9-33-80-K2-S

Customization is available upon request.