

QBF-10090-10110-45

10.09~10.11GHz, 45dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	10.09~10.11GHz
3dB Bandwidth:	20MHz max.
Insertion Loss:	2dB max. @1.01GHz
Return Loss:	18dB min. @1.01GHz
Stopband Attenuation:	45dB@DC~10.03GHz min. 45dB@10.17~13GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	90*25*17mm 3.543*0.984*0.669in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	+15~+30°C
--------------	-----------

Outline Drawings

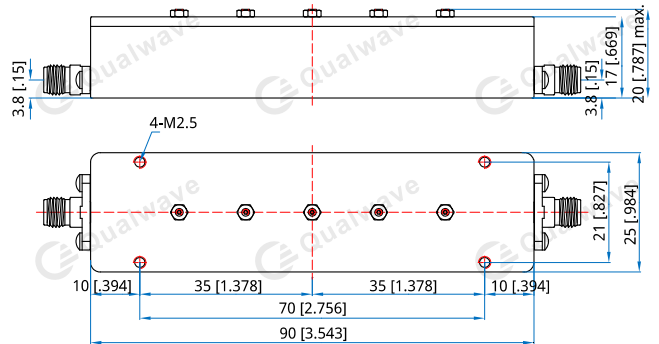

Unit: mm [in]
 Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-10090-10110-45

Customization is available upon request.