

QBF-10900-11100-60

10.9~11.1GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	10.9~11.1GHz
Passband Insertion Loss:	3.0dB max.
VSWR:	1.5 max.
Stopband Attenuation:	60dB min. @10.2GHz 60dB min. @11.8GHz
Impedance:	50Ω

Mechanical


Size ^{*1} :	35*13*8mm 1.378*0.512*0.315in
RF Connectors:	SMA female, removable Φ0.38mm inner pin
Mounting:	4-M1.6mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

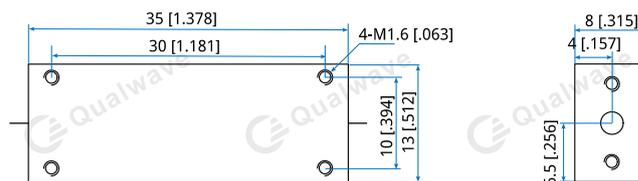

Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

QBF-10900-11100-60

Customization is available upon request.