

## QBF-1100-1800-45

1.1~1.8GHz, 45dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	1.1~1.8GHz
-3dB Passband Width:	700MHz min.
Passband Insertion Loss:	3dB max.
VSWR:	1.5 max.
Passband Ripple:	3dB max.
Stopband Attenuation:	45dB@1GHz min. 45dB@1.9GHz min.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	35*12*8mm 1.378*0.472*0.315in
Connectors:	SMA Female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

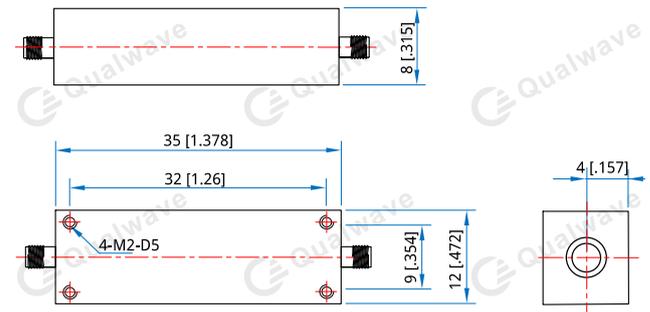

Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

### How To Order

**QBF-1100-1800-45**

Customization is available upon request.