

QBF-1350-1450-70

1.35~1.45GHz

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Frequency ^{*1} :	1.35~1.45GHz
Passband Insertion Loss:	0.5dB max.
Passband Ripple:	0.1dB max.
Stopband Attenuation:	70dB@DC~700MHz min. 70dB@1750~4500MHz min.
VSWR:	1.15 max.
Average Power:	20W max.
Impedance:	50Ω

[1] The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.

Mechanical


Size ^{*2} :	70*26*36mm 2.756*1.024*1.417in
Weight:	0.11Kg
Connectors:	SMA Female
Mounting:	4-M2.5 D8 through-hole

[2] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

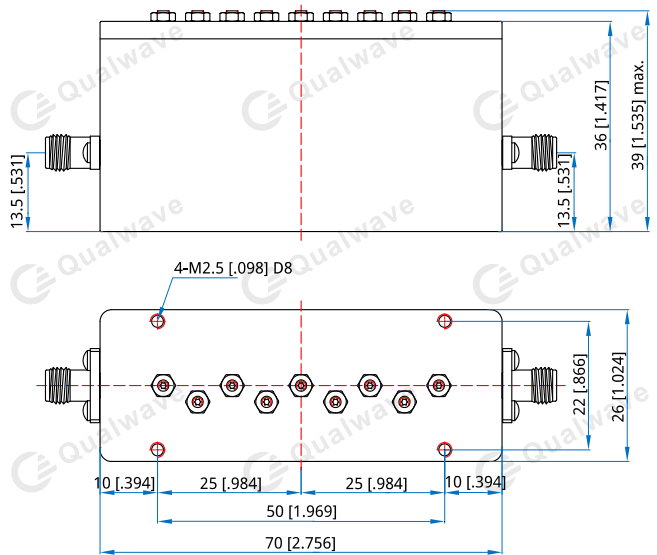

Unit: mm [in]
Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-1350-1450-70

Customization is available upon request.