

QBF-19200-21200-80

19.2~21.2GHz, 80dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Pass Band Frequency:	19.2~21.2GHz
Center Frequency:	20.2GHz
Pass Band Insertion Loss:	1.0dB max.
Pass Band Ripple:	0.4dB max
Stopband Attenuation:	80dB@DC~18.2GHz min. 80dB@22.2~39GHz min.
VSWR:	1.15 max.
Power:	5W max.

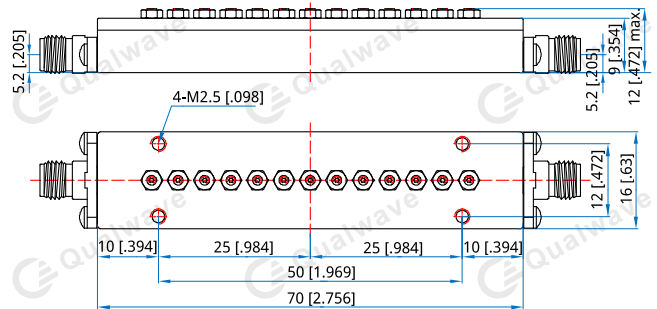
Mechanical

Size ^{*1} :	70*16*12mm 2.756*0.63*0.472in
RF Connectors:	SMA female
Mounting:	4-M2.5 Through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-19200-21200-80

Customization is available upon request.