

QBF-2000-6000-60

2~6GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2~6GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.6 max.
Stopband Attenuation:	60dB@DC~1.4GHz min. 60dB@6.9~21GHz min.
Impedance:	50Ω
Average Power:	10W max.

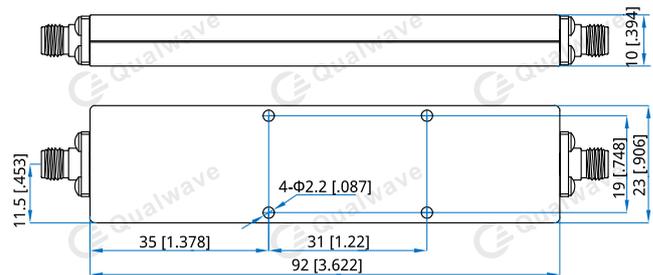
Mechanical

Size ^{*1} :	92*23*10mm 3.622*0.906*0.394in
Connectors:	SMA female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-2000-3000-50

Customization is available upon request.