

## QBF-2000-8000-50

2~8GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	2~8GHz
Passband Insertion Loss:	1.2dB max.
VSWR:	2 max.
Stopband Attenuation:	50dB@DC~1.5GHz min. 50dB@9~18GHz min.
Impedance:	50Ω
Average Power:	1W max.

### Mechanical


Size <sup>*1</sup> :	76*21*10mm 2.992*0.827*0.394in
Connectors:	SMA female, SMA male
Mounting:	4-Φ2.5mm through hole

[1] Exclude connectors.

### Environmental

Temperature:	-45~+85°C
--------------	-----------

### Outline Drawings

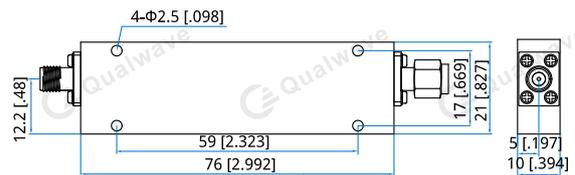

Unit: mm [in]

Tolerance: ±0.508mm [±0.02in]

### How To Order

**QBF-2000-8000-50**

Customization is available upon request.