

QBF-30-70-40

30~70MHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband*1:	30~70MHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	1.2dB max.
VSWR:	1.4 max.
Stopband Attenuation:	40dB@DC~23MHz min. 45dB@95~2500MHz min.
Impedance:	50Ω
Average Power:	1W max.

[1] The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.

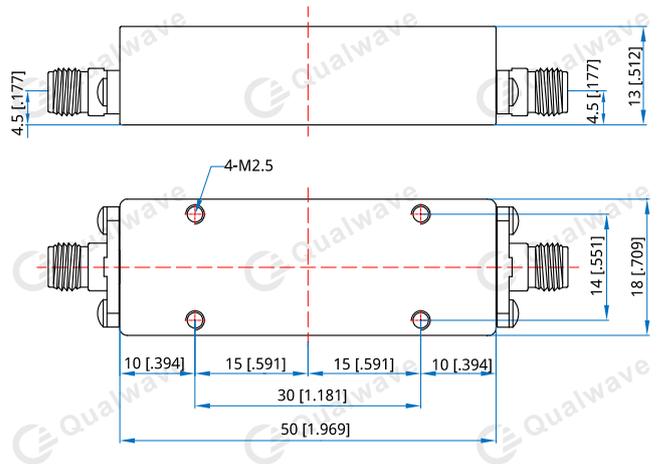
Mechanical

Size*2:	50*18*13mm 1.969*0.709*0.512in
Connectors:	SMA female
Mounting:	4-M2.5mm through hole

[2] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-30-70-40

Customization is available upon request.