

QBF-300-2000-50

0.3~2GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	0.3~2GHz
Passband Insertion Loss:	1.8dB max.
VSWR:	2 max.
Stopband Attenuation:	50dB@DC~0.2GHz min. 50dB@2.5~18GHz min.
Impedance:	50Ω
Average Power:	1W max.

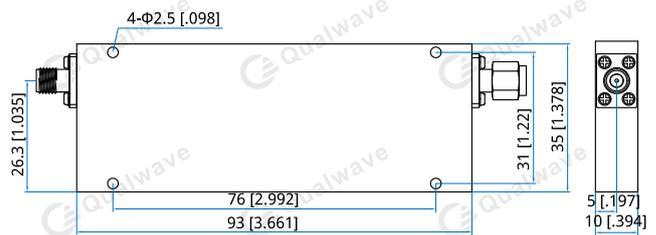
Mechanical

Size ^{*1} :	93*35*10mm 3.661*1.378*0.394in
Connectors:	SMA female, SMA male
Mounting:	4-Φ2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.508mm [±0.02in]

How To Order

QBF-300-2000-50

Customization is available upon request.