

# QBF-4640-4760-60

4.64~4.76GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	4.64~4.76GHz
Passband Insertion Loss:	0.8dB max.
Passband Return Loss:	20dB min.
Passband Ripple:	0.35dB max.
Stopband Attenuation:	60dB @DC ~ 4.52GHz min. 60dB @4.88 ~ 8GHz min.
Average Power:	30W max.
Impedance:	50Ω

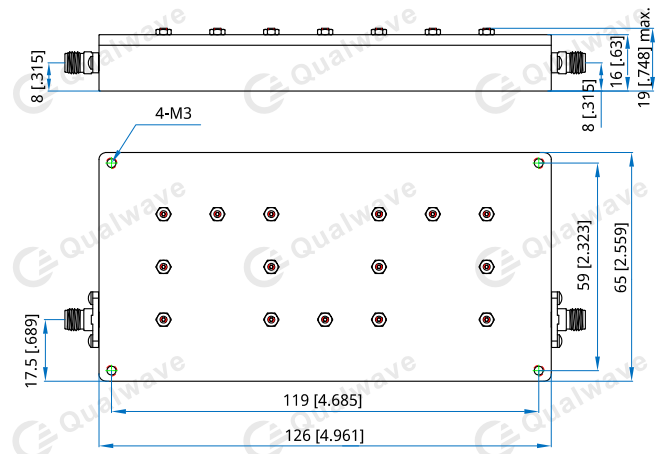
**Mechanical**

Size*1:	126*65*19mm 4.961*2.559*0.748in
Connectors:	SMA
Mounting:	4-M3 through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-10~+50°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QBF-4640-4760-60**

Customization is available upon request.