

# QBF-5692.5-5693.5-13

## 5.6925-5.6935GHz, 13dB

**Features:**  
 \* High Stopband Rejection  
 \* Small Size

**Applications:**  
 \* Telecom  
 \* Laboratory Test  
 \* Receivers  
 \* Instrumentation

### Electrical

Passband:	5.6925-5.6935GHz
Passband Insertion Loss:	2.2dB max.
Passband Ripple:	0.3dB max.
VSWR:	1.3 max.
Stopband Attenuation:	13dB@DC~5.683GHz min. 13dB@5.703~10GHz min.
Impedance:	50Ω
Average Power:	5W max.

### Mechanical


Size <sup>*1</sup> :	140*38*18mm 5.512*1.496*0.709in
Connectors:	SMA Female
Mounting:	6-M2.5 through hole

[1] Exclude connectors.

### Environmental

Temperature:	+10~+30°C
--------------	-----------

### Outline Drawings

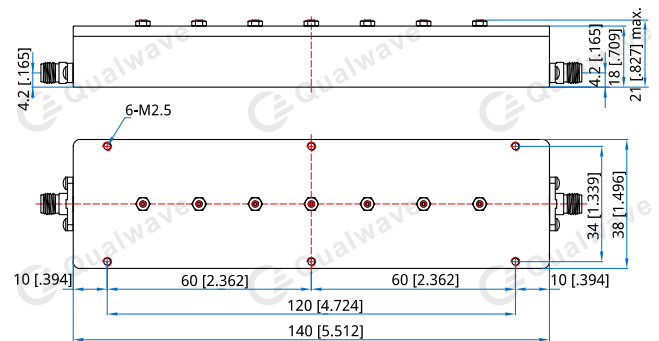

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QBF-5692.5-5693.5-13**

Customization is available upon request.