

# QBF-832-862-50

## 0.832~0.862GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	0.832~0.862GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.22 max.
Passband Ripple:	0.7dB max.
Stopband Attenuation:	60dB @DC ~ 0.817GHz min. 50dB @0.877 ~ 3GHz min.
Impedance:	50Ω
Average Power:	20W max.

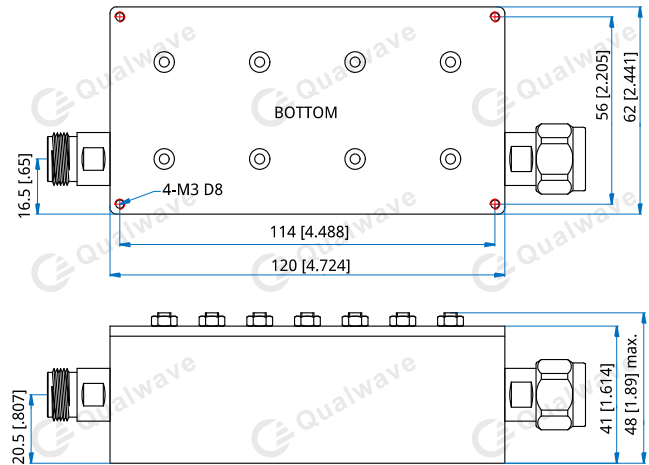
**Mechanical**

Size*1:	120*62*41mm 4.724*2.441*1.614in
Connectors:	N
Mounting:	4-M3 depth 8mm

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QBF-832-862-50**

Customization is available upon request.