

QBF-880-915-45

0.88~0.915GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	0.88~0.915GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.25 max.
Passband Ripple:	1dB max.
Stopband Attenuation:	45dB @DC ~ 0.87GHz, 0.925 ~ 3GHz min.
Impedance:	50Ω
Average Power:	20W max.

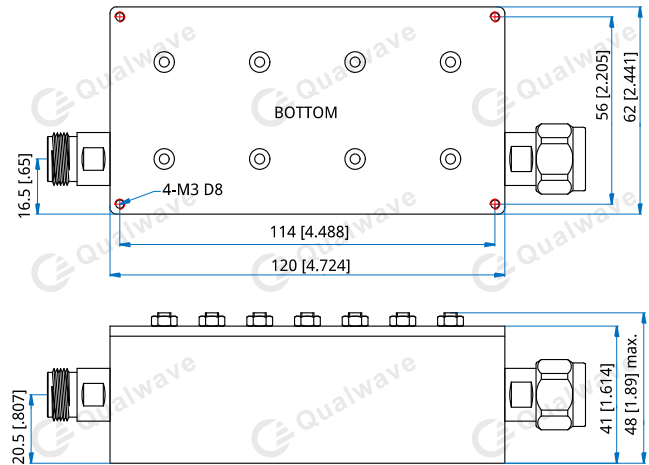
Mechanical

Size*1:	120*62*41mm 4.724*2.441*1.614in
Connectors:	N
Mounting:	4-M3 depth 8mm

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QBF-880-915-45

Customization is available upon request.