

QBF-9500-9900-50

9.5~9.9GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	9.5~9.9GHz
Passband Insertion Loss:	2dB max.
VSWR:	2 max.
Stopband Attenuation:	50dB@DC~9.1GHz min. 50dB@10.3~30GHz min.
Impedance:	50Ω
Average Power:	1W max.

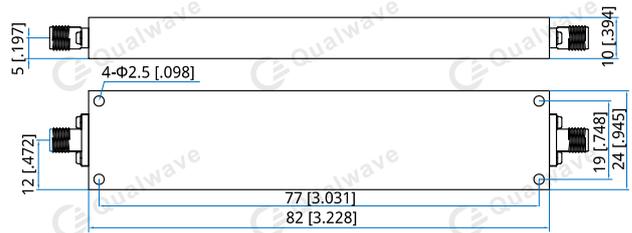
Mechanical

Size ^{*1} :	82*24*10mm 3.228*0.945*0.394in
Connectors:	SMA female
Mounting:	4-Φ2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.508mm [±0.02in]

How To Order

QBF-9500-9900-50

Customization is available upon request.