

# QRF-1166-1186-60

## 1.166~1.186GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~1.146GHz 1.206~3.6GHz
Passband Insertion Loss:	1dB max. @DC~1136MHz, 1216~3600MHz 2dB max. @1136~1146MHz, 1206~1216MHz
Passband VSWR:	1.5 max.
Stopband:	1.166~1.186GHz
Stopband Attenuation:	60dB min.
Average Power:	50W max.
Impedance:	50Ω

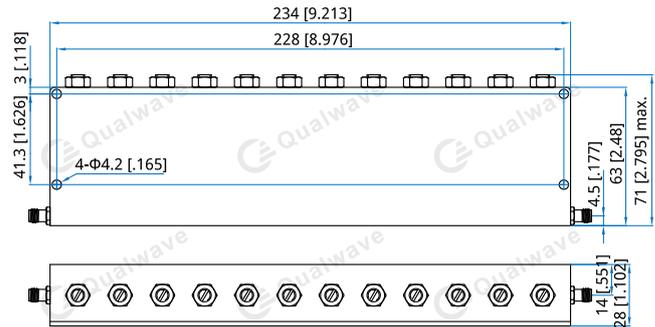
**Mechanical**

Size <sup>*1</sup> :	234*63*28mm 9.213*2.48*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-10~+50°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QRF-1166-1186-60**

Customization is available upon request.