

QRF-1195.1-1219.1-50

1.1951~1.2191GHz, 50dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Passband:	DC~1.1751GHz 1.2391~3.65GHz
Passband Insertion Loss:	1.5dB max. (at the corner: 2.0dB max.)
Passband VSWR:	1.5 max.
Stopband:	1.1951~1.2191GHz
Stopband Attenuation:	50dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	234*62*28mm 9.213*2.441*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

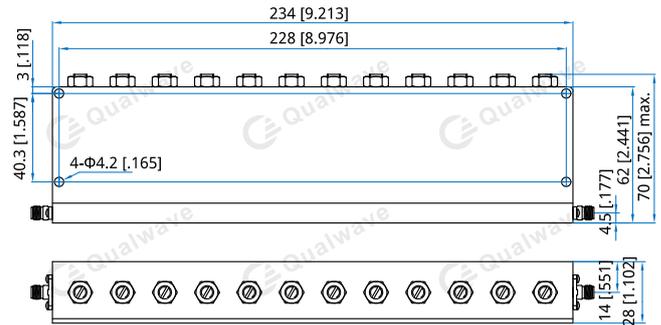

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-1195.1-1219.1-50

Customization is available upon request.