

QRF-1256.5-1280.5-50

1.2565~1.2805GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.2365GHz 1.3005~3.8GHz
Passband Insertion Loss:	1.5dB max. (at the corner: 2.0dB max.)
Passband VSWR:	1.5 max.
Stopband:	1.2565~1.2805GHz
Stopband Attenuation:	50dB min.
Average Power:	50W max.
Impedance:	50Ω

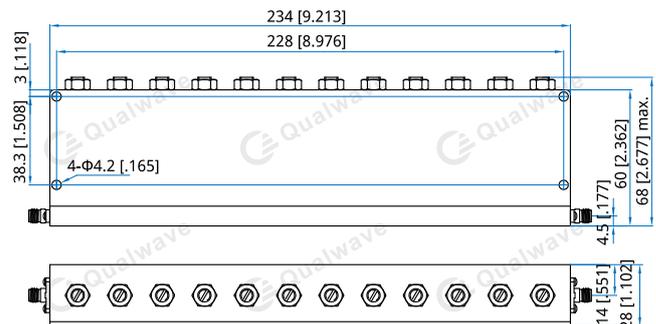
Mechanical

Size ^{*1} :	234*60*28mm 9.213*2.362*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-1256.5-1280.5-50

Customization is available upon request.