

# QRF-1275-1281-40

## 1.275~1.281GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~1.256GHz 1.3~3.9GHz
Passband Insertion Loss:	1dB max. @DC~1246MHz, 1310~3900MHz 2dB max. @1246~1256MHz, 1300~1310MHz
Passband VSWR:	1.5 max.
Stopband:	1.275~1.281GHz
Stopband Attenuation:	40dB min.
Average Power:	20W max.
Impedance:	50Ω

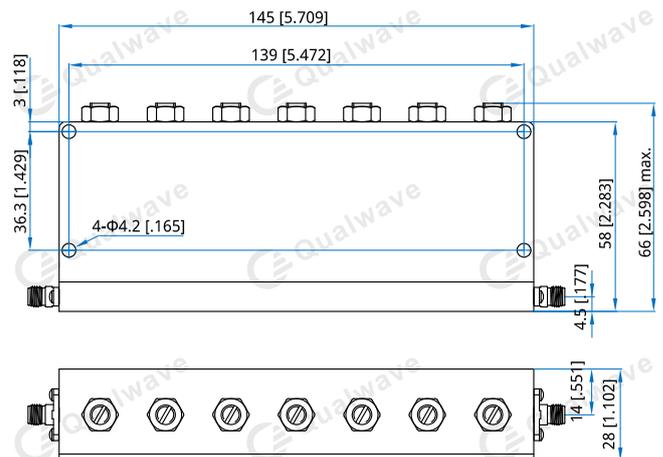
**Mechanical**

Size <sup>*1</sup> :	145*58*28mm 5.709*2.283*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-10~+50°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QRF-1275-1281-40**

Customization is available upon request.