

# QRF-1559-1605-50

## 1.559~1.605GHz, 50dB

Features:  
 \* High Stopband Rejection  
 \* Small Size

Applications:  
 \* Telecom  
 \* Laboratory Test  
 \* Receivers  
 \* Instrumentation

### Electrical

Passband:	DC~1.539GHz 1.625~4.5GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	1.559~1.605GHz
Stopband Attenuation:	50dB min.
Average Power:	50W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	245*52*22mm 9.646*2.047*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Temperature:	-10~+50°C
--------------	-----------

### Outline Drawings

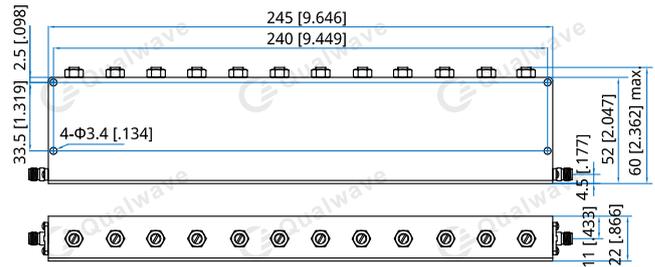

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

### How To Order

**QRF-1559-1605-50**

Customization is available upon request.