

QRF-1626.5-1660.5-60

1.6265~1.6605GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.6075GHz 1.6895~4.6GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	1.6265~1.6605GHz
Stopband Attenuation:	60dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	245*52*22mm 9.646*2.047*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

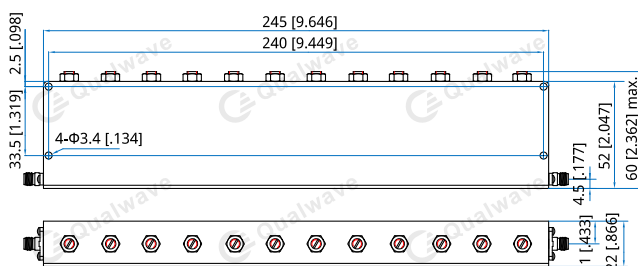

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-1626.5-1660.5-60

Customization is available upon request.