

# QRF-2110-2170-60-1

## 2.11~2.17GHz, 60dB

<b>Features:</b> * High Stopband Rejection * Small Size	<b>Applications:</b> * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

### Electrical

Passband:	DC~2.06GHz 2.22~6GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max.
Stopband:	2.11~2.17GHz
Stopband Attenuation:	60dB min.
Average Power:	50W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	209*41*22mm 8.228*1.614*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Temperature:	-20~+60°C
--------------	-----------

### Outline Drawings

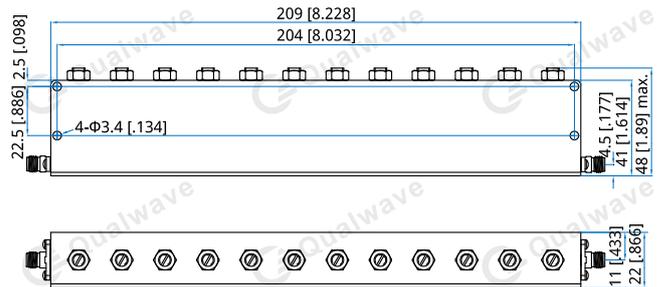

Unit: mm [in]  
 Tolerance: ±0.4mm [±0.016in]

### How To Order

**QRF-2110-2170-60-1**

Customization is available upon request.