

QRF-24000-24500-40

24~24.5GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~23.5GHz 25~40GHz
Passband Insertion Loss:	3dB max.
Passband VSWR:	2 max.
Stopband:	24~24.5GHz
Stopband Attenuation:	40dB min.
Impedance:	50Ω

Mechanical


Size ^{*1} :	40*15*10mm 1.575*0.591*0.394in
Finish:	Black Paint
RF Connectors:	2.92mm female

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

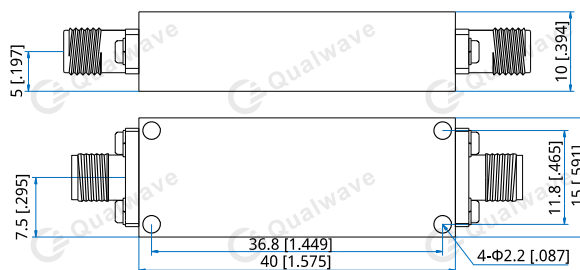

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRF-24000-24500-40

Customization is available upon request.