

## QRF-430-438-60

0.43~0.438GHz, 60dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

|                          |                         |
|--------------------------|-------------------------|
| Passband:                | DC~0.34GHz<br>0.55~1GHz |
| Passband Insertion Loss: | 2dB max.                |
| Passband VSWR:           | 1.8 max.                |
| Stopband:                | 0.43~0.438GHz           |
| Stopband Attenuation:    | 60dB min.               |
| Average Power:           | 1W max.                 |
| Impedance:               | 50Ω                     |

### Mechanical


|                      |                                   |
|----------------------|-----------------------------------|
| Size <sup>*1</sup> : | 30*18*13mm<br>1.181*0.709*0.512in |
| Weight:              | 20g                               |
| RF Connectors:       | SMA female<br>SMA male            |
| Mounting:            | 4-M2.5mm through-hole             |

[1] Exclude connectors.

### Environmental

|              |           |
|--------------|-----------|
| Temperature: | -30~+70°C |
|--------------|-----------|

### Outline Drawings

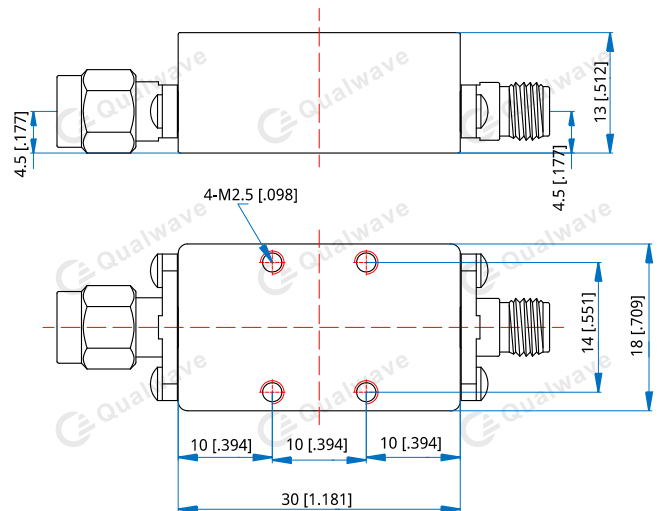

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QRF-430-438-60**

Customization is available upon request.