

QRF-5470-5895-50

5.47~5.895GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~5.26GHz 6.04~11GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.7 max.
Stopband:	5.47~5.895GHz
Stopband Attenuation:	50dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	137*27*11mm 5.394*1.063*0.433in
RF Connectors:	SMA female SMA male
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+50°C
--------------	---------

Outline Drawings

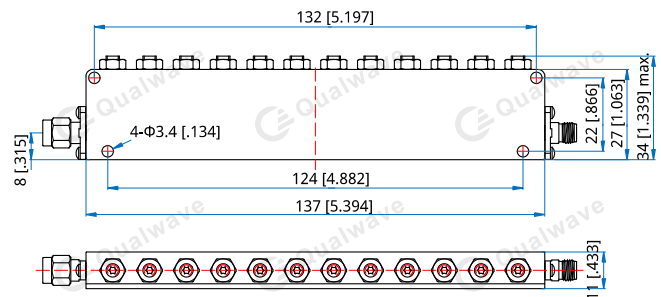

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-5470-5895-50

Customization is available upon request.