

QBTP-5-700-S

High Power, 0.005~0.7GHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	0.005~0.7GHz
Insertion Loss:	0.5dB max.
VSWR:	1.8 max.
Voltage:	0~48V DC
Current:	3.13A@48V
RF Input Power:	150W max.

Mechanical


Size ^{*1} :	40*20*13mm 1.575*0.787*0.512in
RF Connectors:	SMA
Power Supply & Control Interface:	Solder Pin & Terminal Post
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

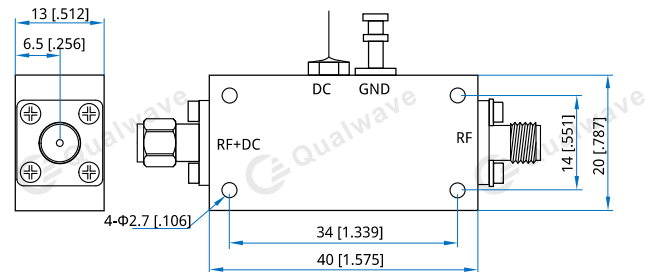

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBTP-5-700-S

Customization is available upon request.