

QDRHA-2000-8000-S

2~8GHz, SMA

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

| | |
|-------------------------|--|
| Frequency: | 2~8GHz |
| VSWR: | 2.5 max. |
| Gain: | 5dB min. |
| Beamwidth: | 20° min. @H plane 20° min. @E plane |
| Polarization Isolation: | 20dB min. |
| Average Power: | 50W CW |
| Peak Power: | 100W |
| Polarization Method: | Linear |
| Impedance: | 50Ω |

Mechanical


| | |
|-------------|--|
| Size: | 111.5*102.2*75mm 4.39*4.024*2.953in |
| Material: | Aluminium |
| Connectors: | SMA female |

How To Order

QDRHA-2000-8000-S

Customization is available upon request.

Outline Drawings

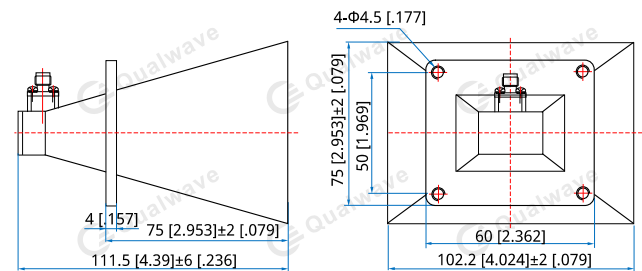

Unit: mm [in]

Tolerance: ±6mm [±0.236in]