

# QCB-MRB-141-1

## BNC Male, Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V
Impedance:	50Ω


### Mechanical

RF Connector:	BNC male right angle
Mating Cable:	QH400, QD141, QE141
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

### Environmental

Temperature:	-55~+165°C
--------------	------------

### Outline Drawings

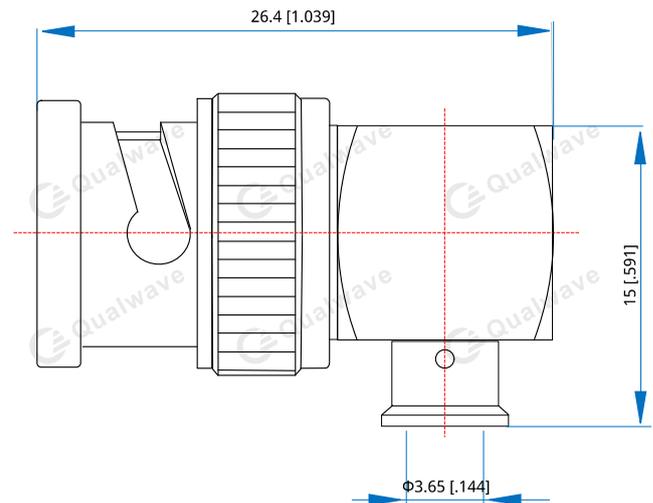

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**QCB-MRB-141-1**

Customization is available upon request.