QCK-MG-047-3

2.92mm Male

Features:
* Low VSWR

Applications:
* Laboratory Test
* Telecommunication
* Wireless
* Instrumentation

Electrical

Frequency:	DC~40GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

Mechanical

RF Connector:	2.92mm male
Mating Cable:	QA150, QD047, QE047
Outer Conductor:	Passivated stainless steel
Inner Conductor:	Gold plated beryllium copper
Dielectric:	PEI

How To Order

QCK-MG-047-3

Customization is available upon request.

Outline Drawings

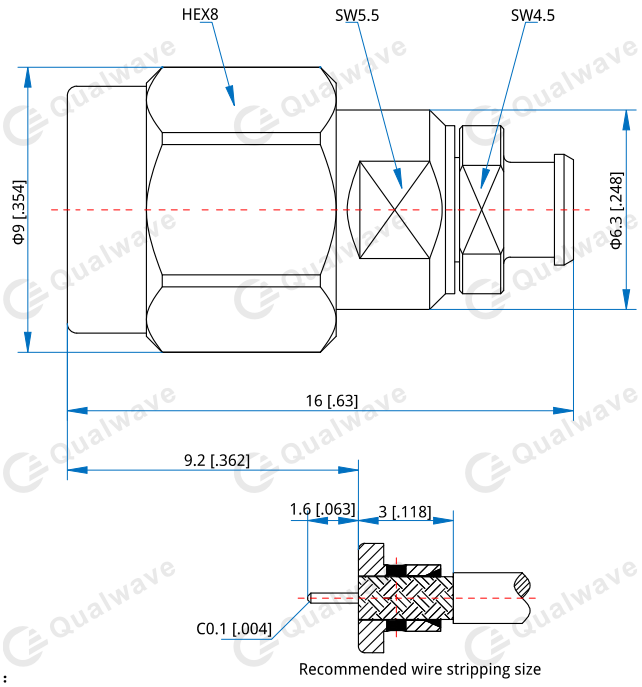

:

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]