

QCM-MCB-RG142-1

MCX Male, Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V
Impedance:	50Ω

Mechanical

RF Connector:	MCX Male
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass
Mating Cable:	RG142, RG142U, RG223, RG58

Environmental


Operating Temperature:	-55~+165°C
------------------------	------------

How To Order

QCM-MCB-RG142-1

Customization is available upon request.

Outline Drawings

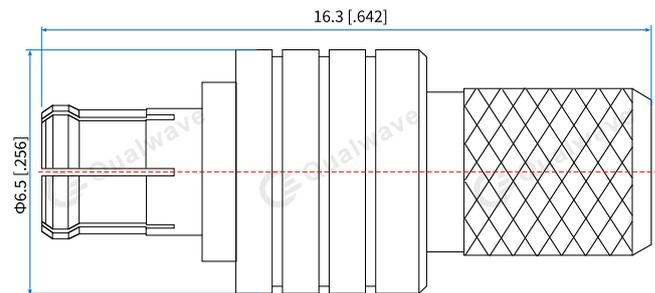

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]