

QCN-FG-Z500-1

N Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	1000V DC min.
Impedance:	50 Ω

Mechanical


RF Connector:	N Female
Mating Cable:	QZ500
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PEI&PTFE
Inner Conductor:	Gold plated brass & Gold plated beryllium copper

How To Order

QCN-FG-Z500-1

Customization is available upon request.

Outline Drawings

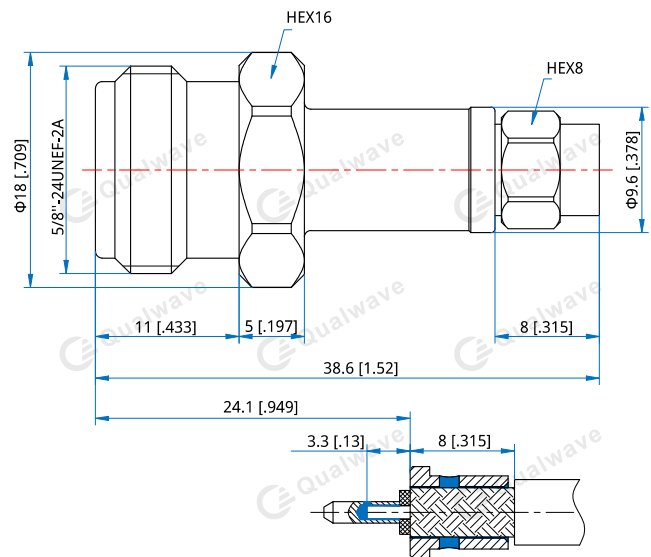

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]