

QCP-FRB-047-3

SMP Female Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~40GHz
VSWR:	1.5 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V rms min.
Impedance:	50Ω

Mechanical


RF Connector:	SMP Female Right Angle
Mating Cable:	QA150, QH160, 047
Outer Conductor:	Gold plated beryllium copper, Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

How To Order

QCP-FRB-047-3

Customization is available upon request.

Outline Drawings

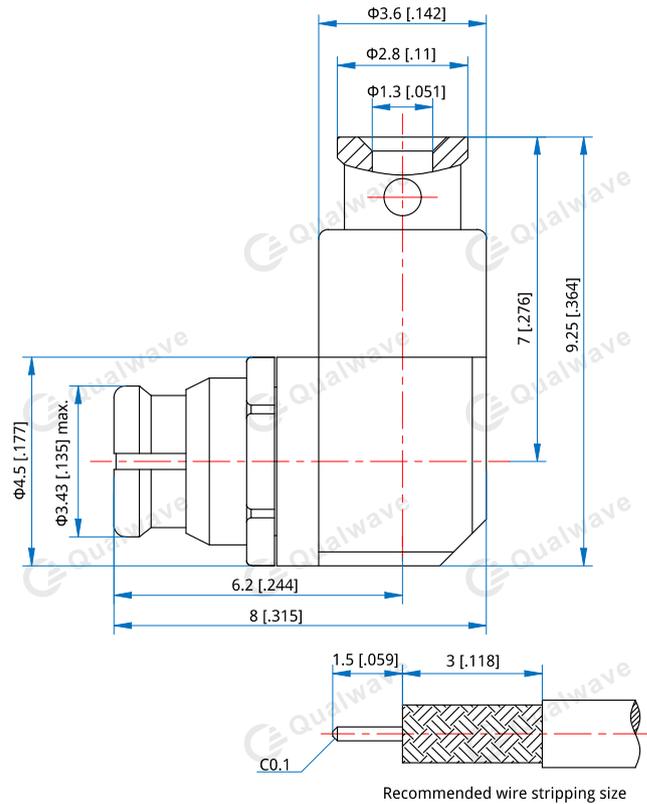

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]