

QCP-MRB-086-2

SMP Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

| | |
|--------------------------|---------------|
| Frequency: | DC~18GHz |
| VSWR: | 1.3 max. |
| Impedance of Dielectric: | 5000MΩ min. |
| Voltage Withstand: | 500V rms min. |
| Impedance: | 50Ω |

Mechanical


| | |
|------------------|------------------------------|
| RF Connector: | SMP male right angle |
| Mating Cable: | QH280, QD086, QE086, RG316 |
| Outer Conductor: | Gold plated brass |
| Dielectric: | PTFE |
| Inner Conductor: | Gold plated beryllium copper |

How To Order

QCP-MRB-086-2

Customization is available upon request.

Outline Drawings

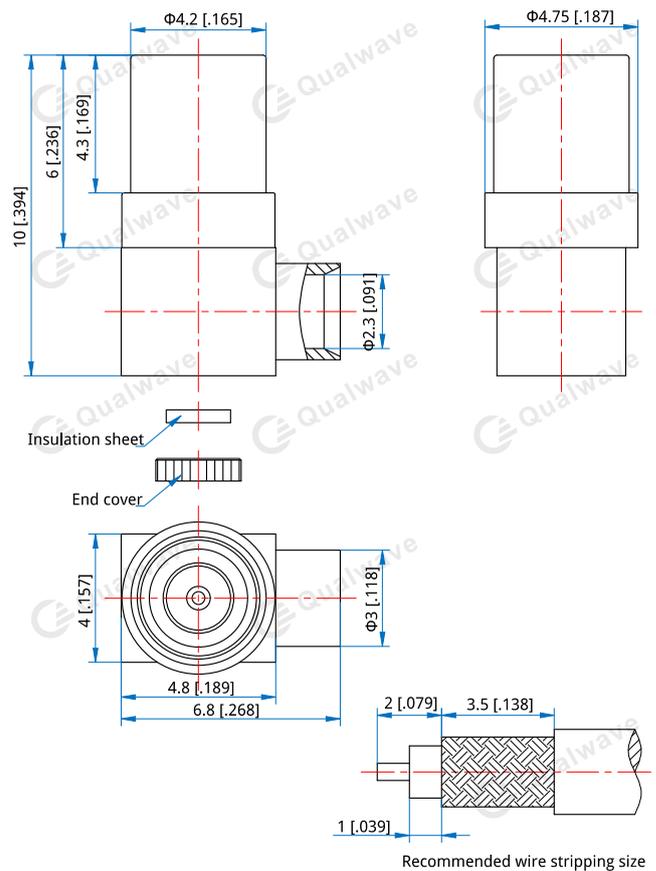

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]