

QCSI-FB-086-1

SBMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	500V
Impedance:	50 Ω


Mechanical

RF Connector:	SBMA female
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper
Mating Cable:	QH280, QE086, QD086, RG316

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

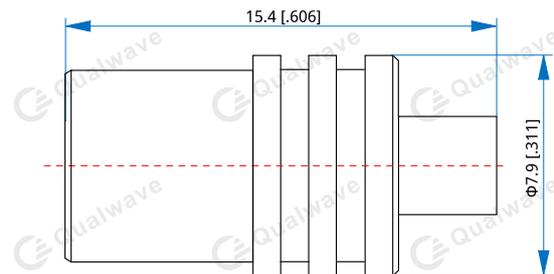

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QCSI-FB-086-1

Customization is available upon request.