

QCX-MB-047-1

MMCX Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V rms min.
Impedance:	50Ω

Mechanical


RF Connector:	MMCX male
Mating Cable:	QA150, QH160, 047, RG178
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated phosphor copper

How To Order

QCX-MB-047-1

Customization is available upon request.

Outline Drawings

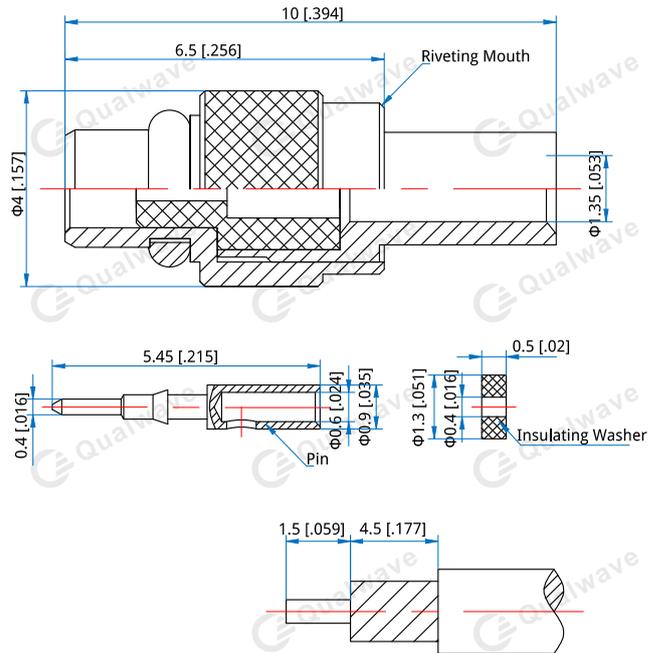

Unit: mm [in]

Tolerance: $\pm 0.4\text{mm}$ [$\pm 0.016\text{in}$]