

QWCK-22

WR-22, 32.9~50.1GHz


Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
QWCA-22-2F-R-5	32.9~50.1	1.2	Waveguide to coax adapter, WR-22 (BJ400) to 2.4mm(f), right angle, UG-383/U	Brass	Gold-plating	-	2	Outline A
QWT22-5-B-5	32.9~50.1	1.05	Low power waveguide termination, WR-22 (BJ400), 5W, UG-383/U	Brass	Pickling passivation	Gray paint	1	Outline B
QWS22-C-15	32.9~50.1	-	Waveguide short, WR-22 (BJ400), 3.3mm, UG-383/U	Brass	-	-	1	Outline D
QWSS22-3.3-C-15	32.9~50.1	-	1/4λ Waveguide straight section, WR-22 (BJ400), 3.3mm, UG-383/U	Brass	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

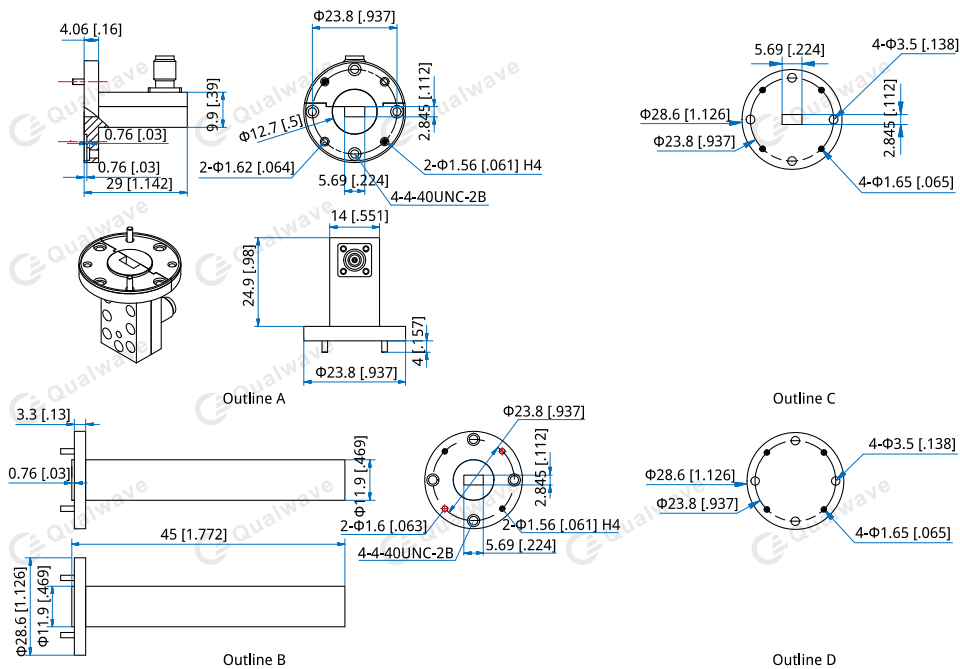

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -50~+85°C

How To Order**QWCK-22** All the 5 components in one box.