

QWCK-229

WR-229, 3.22~4.9GHz


Features:
 * Broad Band
 * Low VSWR



Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency	VSWR	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
	(GHz)	(Max.)						
QWCA-229-SF-R-2	3.22~4.9	1.2	Waveguide to coax adapter, WR-229 (BJ40) to SMA(f), right angle, FDP40	Aluminium	Conductive oxidation	Gray paint	2	Outline A
QWT229-15-A-2	3.22~4.9	1.03	Low power waveguide termination, WR-229 (BJ40), 15W, FDP40	Aluminium	Conductive oxidation	Gray paint	1	Outline B
QWS229-A-2	3.22~4.9	-	Waveguide short, WR-229 (BJ40), 8mm, FDP40	Aluminium	-	-	1	Outline D
QWSS229-8-A-2	3.22~4.9	-	1/4λ Waveguide straight section, WR-229 (BJ40), 8mm, FDP40	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

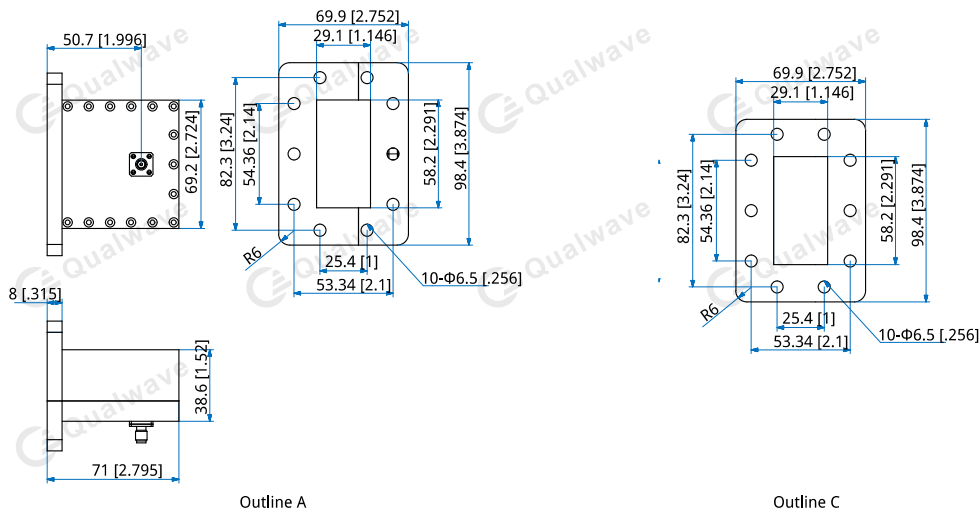

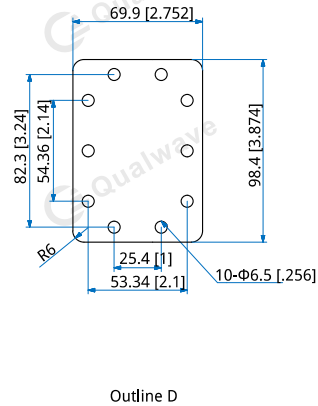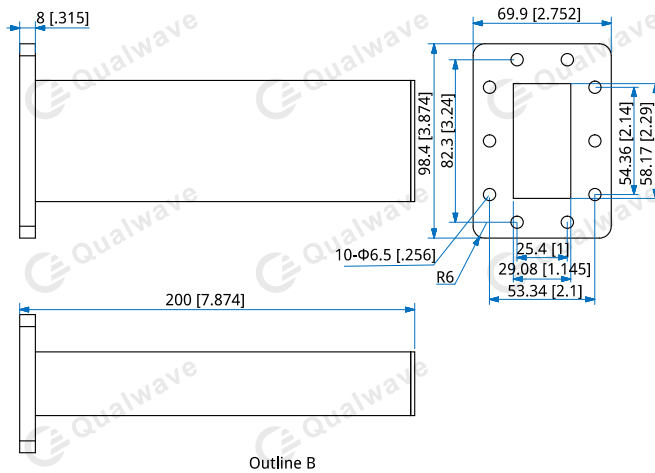

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -50~+85°C

How To Order

QWCK-229 All the 5 components in one box.