

# QA5V

## 1.35mm to 1.85mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	DC~67GHz
VSWR:	1.25 max.
Impedance:	50Ω

### Mechanical

RF Connectors:	1.35mm 1.85mm
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	CPS
Inner Conductor:	Gold plated beryllium copper

### How To Order

**QA5V-MM** - 1.35mm (m) to 1.85mm (m), Outline A

**QA5V-MF** - 1.35mm (m) to 1.85mm (f), Outline B

**QA5V-FM** - 1.35mm (f) to 1.85mm (m), Outline C


**QA5V-FF** - 1.35mm (f) to 1.85mm (f), Outline D

Customization is available upon request.

### Environmental

Temperature: -55~+85°C

### Outline Drawings

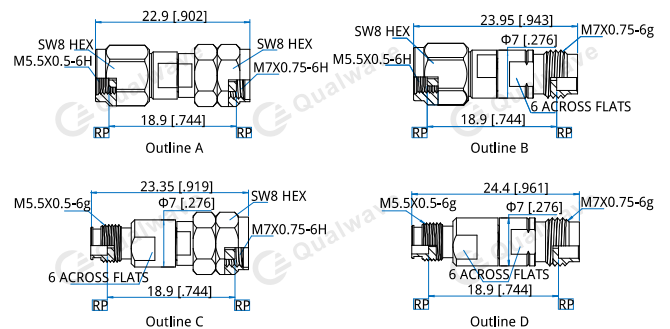

Unit: mm [in]

Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]