

QAS4-1

SMA to 4.3-10

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V
IM3:	-155dBc
Impedance:	50Ω

Mechanical

RF Connectors:	SMA 4.3-10
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Sliver plated beryllium copper

Environmental


Temperature:	-55~+165°C
--------------	------------

How To Order

QAS4-FM-1 - SMA(f) to 4.3-10(m)

Customization is available upon request.

Outline Drawings

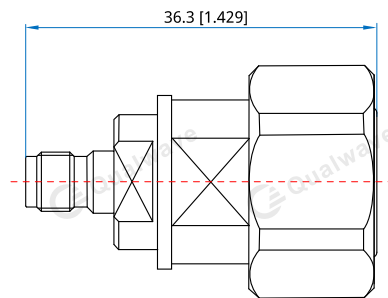

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]