

QCI5656A

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

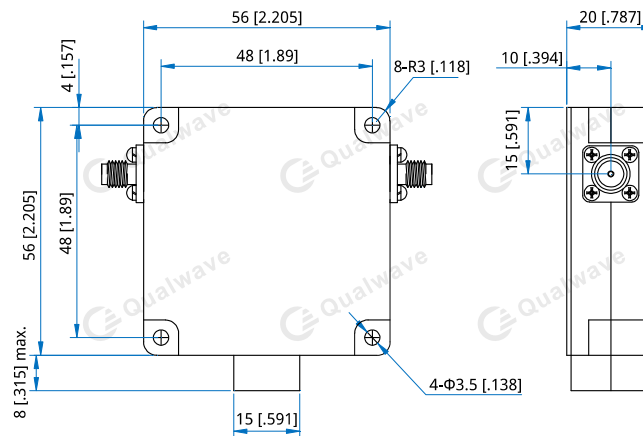
- * Wireless
- * Radar
- * Laboratory Test

Description

QCI5656A series Coaxial Isolators cover frequency range 800~2000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Connector	Temperature (°C)
800~2000	1200	1.20	13.0	1.60	50	20	SMA	+25~+85

Outline Drawings


Unit: mm [inch] Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*1: 56*56*20mm
2.205*2.205*0.787in

Mounting: 4-Φ3.5mm through-hole

[1] Exclude connectors and terminations.

Connector Naming Rules:

S - SMA Female

Direction Naming Rules:

- 1 - Clockwise
- 2 - Anticlockwise

How To Order
QCI5656A-U-V-W-X-Y-Z

U: Start frequency in MHz

V: Stop frequency in MHz

W: Forward power in W

X: Reverse power in W

Y: Connector type

Z: Direction type

Examples:

To order a QCI5656A series Isolator, 800~2000MHz, Forward power 50W, Reverse power 20W, SMA female, specify, Clockwise ,
QCI5656A-8000-2000-50-20-S-1.

Customization is available upon request.