

QDB-100-18000-K1-SSF

0.1~18GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

| | |
|------------------|------------|
| Frequency Range: | 0.1~18GHz |
| Insertion Loss: | 0.5dB max. |
| VSWR: | 1.3 max. |
| Impedance: | 50Ω |
| Voltage: | 100V |


Mechanical

| | |
|--------------------------|------------------------------|
| Length: | 29.6mm 1.165in |
| Connectors: | SMA male SMA female |
| Outer Conductors: | Stainless steel |
| Female Inner Conductors: | Gold plated beryllium copper |
| Male Inner Conductors: | Gold plated brass |
| Housing: | PEEK |
| Type: | Inner / Outer |

Environmental

| | |
|------------------------|-----------|
| Operating Temperature: | -45~+55°C |
|------------------------|-----------|

Outline Drawings

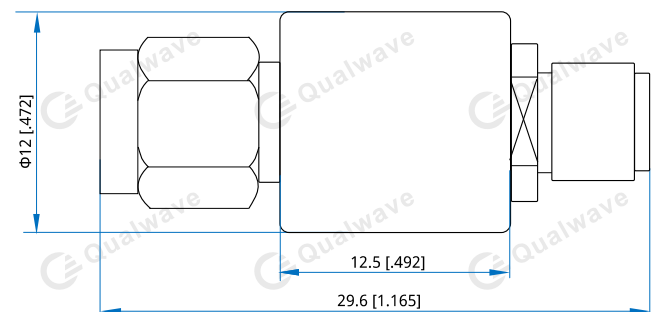

Unit: mm [in]
 Tolerance: ±5%

How To Order

QDB-100-18000-K1-SSF

Customization is available upon request.