

QDB-50-8000-3K-NNF

0.05~8GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	0.05~8GHz
Impedance:	50Ω
Voltage:	3000V max.
Average Power:	200W@25°C

Frequency (GHz)	VSWR (max.)	Insertion Loss (max.)
0.05~3	1.15	0.25
3~6	1.3	0.35
6~8	1.55	0.5


Mechanical

Connectors:	N
Outer Conductors:	Ternary alloy plated brass
Housing:	Aluminum & Nylon
Male Inner Conductors:	Sliver plated brass
Female Inner Conductors:	Sliver plated beryllium copper
Type:	Inner / Outer
ROHS Compliant:	Full ROHS compliance

Environmental

Temperature: -45~+55°C

Outline Drawings

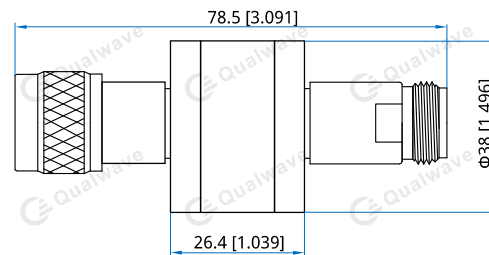

Unit: mm [in]
 Tolerance: ±2%

How To Order

QDB-50-8000-3K-NNF

Customization is available upon request.