

QDB-9K-8000

9KHz~8GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar



Electrical

Frequency Range:	9K~8GHz
Insertion Loss:	0.4dB max.
VSWR:	1.25 max.
Impedance:	50Ω
Voltage:	75V max.

Mechanical

Connectors:	SMA, N
Type:	Inner

Environmental


Operation Temperature:	-35~+75°C
Storage temperature:	-45~+85°C

How To Order

- [QDB-9K-8000-SFSF](#) - Outline A
- [QDB-9K-8000-SSF](#) - Outline B
- [QDB-9K-8000-NFNF](#) - Outline C
- [QDB-9K-8000-NNF](#) - Outline D

Customization is available upon request.

Outline Drawings

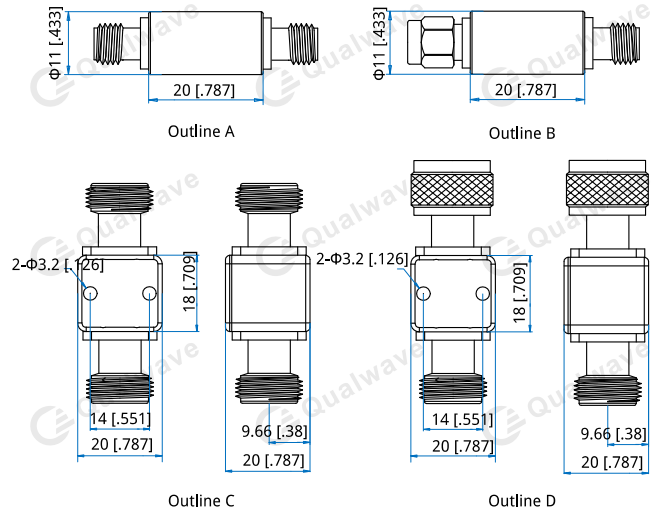

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

Typical Performance Curves

