

QDPHA-700-6000-5-S

0.7~6GHz, 5dB, SMA

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical


Frequency:	0.7~6GHz
Gain:	5dBi min.
Beamwidth:	16° min.
VSWR:	3 max.
Cross Pol. Isolation:	18dB min.
Port to Port Isolation:	20dB min.

Mechanical

Size:	587* Φ 344mm 23.11*13.543in
Connectors:	SMA female
Polarization:	Dual linear
Material:	Aluminum
Finish:	Conductive oxidation

Outline Drawings

(Preliminary reference size, subject to the final shape before production)

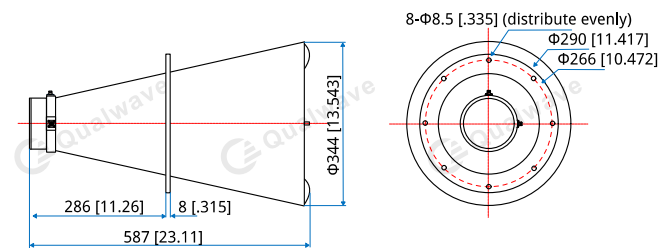

Adjustable mounting interfaces, designable brackets.

Unit: mm [in]

Tolerance: \pm 3mm [\pm 0.118in]

How To Order

QDPHA-700-6000-5-S

Customization is available upon request.