

## QDPHA-700-6000-S

0.7~6GHz, SMA

Features:  
\* Broadband

Applications:  
\* Wireless  
\* Transceiver  
\* Laboratory Test  
\* Broadcast

### Electrical


Frequency:	0.7~6GHz
Gain:	5dBi min.
Beamwidth:	16° min.
VSWR:	3 max.
Cross Pol. Isolation:	18dB min.
Port to Port Isolation:	20dB min.

### Mechanical

Size:	587* $\Phi$ 344mm 23.11*13.543in
Connectors:	SMA female
Polarization:	Dual linear
Material:	Aluminum
Finish:	Conductive oxidation

### Outline Drawings

(Preliminary reference size, subject to the final shape before production)

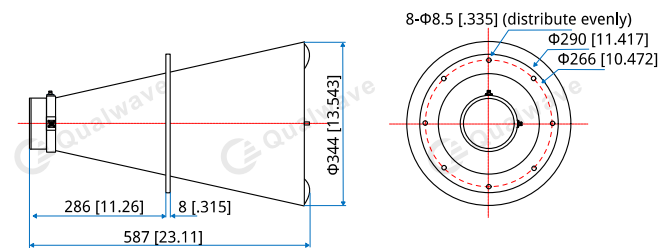

Adjustable mounting interfaces, designable brackets.

Unit: mm [in]

Tolerance:  $\pm 3$ mm [ $\pm 0.118$ in]

### How To Order

**QDPHA-700-6000-S**

Customization is available upon request.