

QE-1000-18000-S-20

1~18GHz, 20dB

Features:
* Low VSWR
* Small Size

Applications:
* Amplifier
* Laboratory Test
* Instrumentation

Electrical

Frequency:	1~18GHz
Insertion Loss:	4.5dB max.
VSWR:	2 max.
Slope:	20dB
Attenuation:	4.5dB @1GHz 24.5dB @18GHz
Linearity:	±2dB max.
Power Handling:	+23dBm max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*20*8mm 1.181*0.787*0.315in
Connectors:	SMA Female (Removable)
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

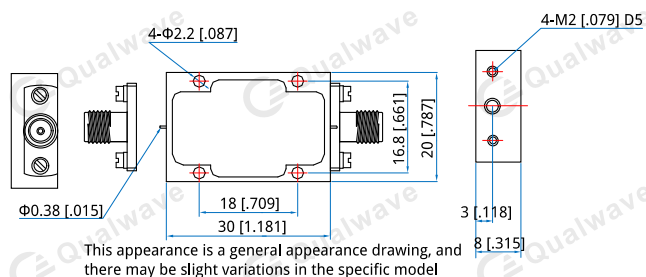

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QE-1000-18000-S-20

Customization is available upon request.