

QCV-FL2G-S-03

1.85mm Connector, DC~65GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~65GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Impedance:	50Ω


Mechanical

RF Connector:	1.85mm Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper
Accept PIN:	ΦDmm, depth 2mm max.

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

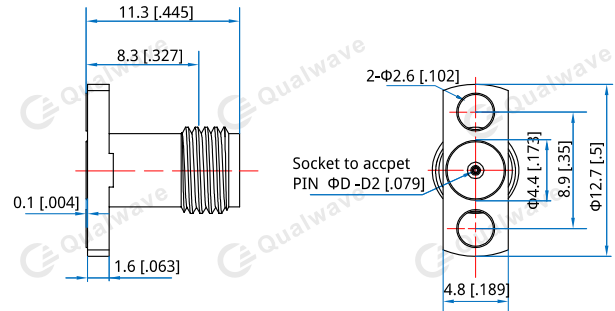

Size	D	
mm	0.23	0.30
in	0.009	0.012

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QCV-FL2G-S23-03 - ΦD: Φ0.23mm

QCV-FL2G-S30-03 - ΦD: Φ0.3mm

Customization is available upon request.