

QHF-2700-16000-60

2.7~16GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.7~16GHz
Insertion Loss:	2dB max. @2.7~2.95GHz 1dB max. @2.95~16GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB min. @DC~2.36GHz
Impedance:	50Ω
Average Power:	15W max.

Mechanical


Size ^{*1} :	45*30*10mm 1.772*1.181*0.394in
Weight:	45g
Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

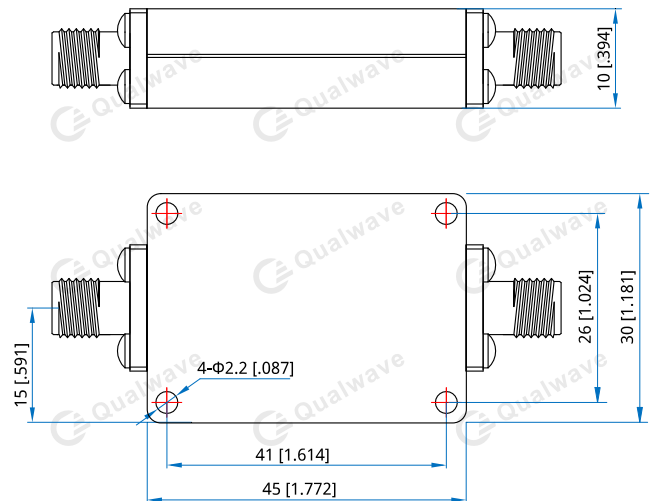

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHF-2700-16000-60

Customization is available upon request.